


### ON-GVPLKD-F240XMTRM C6A Vertical Keystone Jack Loaded, 19"-1U Patch Panel

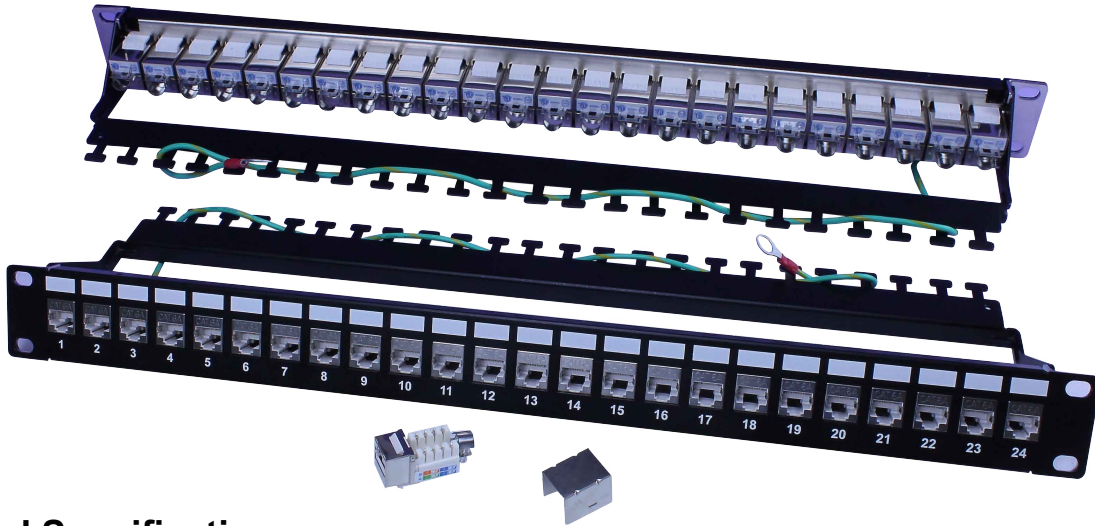

#### Electrical Specifications

- Insulation Resistance : 500M ohms (min.)
- Contact Resistance : 20m ohms (max.)
- Current Rating : 1.5 Amps.
- DC Resistance : 0.1 ohms (max.)
- Withstanding Voltage : 100 VAC RMS @ 60Hz / 1 min.

#### Mechanical Specifications

- IDC Punch Down Cycle : Over 250 Cycles (min.)
- Jack Inserion Cycle : Over 2000 Cycles (min.)
- Operation Temperature : -40°C ~ +70°C

#### Performance

Meets C6A EIA/TIA 568C Standard

#### Materials

Panel	Metal (SPCC)
Cable Management	Metal (SPCC)
Keystone Body	Fireproof ABS UL-94V0
Metallic Case	Metal
Jack	8P8C 50 micro inches gold plated
PCB	FR-4 / UL-94V0
IDC Body	Fireproof ABS UL-94V0
IDC Pin	Bronze & Tinned
IDC Description	For 22-26AWG. For 110 or Krone punch-down Tool