

W23 Rated 8 Position IP65 Indoor/Outdoor Distribution Box

Up to 8 fibres

fibres

W23

This IP65 distribution box offers the ability to terminate 8 fibres housed in a robust ABS enclosure for indoor and outdoor applications.

With the ability to use a full array of adaptor types offering a flexible solution to the end user, enabling them to incorporate a multi functional enclosure which allows easy access during installation or re-work with no disturbance of the existing cable or fibres.

In addition to the array of adaptors the enclosure also offers up to 8 exit points for patching cables and 1 standard cable entry points for loose tube, tight buffer, pre-terminated and steel tape armoured cable.

Each enclosure has integrated strength member tie positions and bend radius protection with the addition of a removable front door allowing for quick and easy installation.

- ▶ Up to 8 fibres
- ▶ Multiple adaptor options available
- ▶ 8 adaptor positions
- ▶ IP65.
- ▶ Accepts loose tube, distribution and pre terminated cables
- ▶ Integrated bend radius protection
- ▶ Sealing glands for up to 8 cables
- ▶ Removable door for ease of installation
- ▶ ROHS, REACH SvHC
- ▶ Supplied with 12 heatshrink splice protectors
- ▶ Supplied with transit tubing
- ▶ Supplied with wall fixings and tie wraps



Technical Specification

IP Rated Distribution Box for Internal/External Use	
Height	210mm
Width	175mm
Depth	50mm
Net weight	404 grams
Packed weight	460 grams
Packaged dimensions	215mm x 182mm x 51mm
IP rating	IP65
Suitable for adaptor type	SC Simplex LC Duplex
Number of fibres	8
Number of ports	8
Cable entry 20mm	1
Cable exit 20mm	2
Material	ABS
Colour	White
Operating temperature	-40°C to +50°C
Designed in accordance with	TIA/EIA 568.C, ISO/IEC 11801, EN50173, IEC60304, IEC61754, EN297-1
Compliant to	RoHS, Reach/SVHC

Applications

- ▶ Data centres, premise installations, telecommunication networks
- ▶ Ethernet, Fibre Channel, ATM, LAN, MAN and WAN
- ▶ Data communication and telecommunication networks
 - ▶ Indoor applications

Ordering Information

W23XXX00

12 W24 Rated 6 Position IP65 Indoor/Outdoor Distribution Box Up to 12 fibres

fibres

W24

This lockable IP65 distribution box offers the ability to terminate 12 fibres housed in a strong robust ABS enclosure for indoor and outdoor applications.

With the ability to use a full array of adaptor types offering a flexible solution to the end user, enabling them to incorporate a multi functional enclosure which allows easy access during installation or re-work with no disturbance of the existing cable or fibres.

In addition to the array of adaptors the enclosure also offers up to 12 exit points for patching cables and 1 standard cable entry points for loose tube, tight buffer, pre-terminated and steel tape armoured cable.

Each enclosure has integrated strength member tie positions and bend radius protection with the addition of a removable front door allowing for quick and easy

- ▶ Up to 12 fibres
- ▶ Multiple adaptor options available
- ▶ 6 adaptor positions
- ▶ IP65.
- ▶ Accepts loose tube, distribution and pre terminated cables
- ▶ Integrated bend radius protection
- ▶ Sealing glands for up to 12 cables
- ▶ Lockable door
- ▶ Removable door for ease of installation
- ▶ ROHS, REACH SvHC
- ▶ Supplied with 12 heatshrink splice protectors
- ▶ Supplied with transit tubing
- ▶ Supplied with wall fixings and tie

wraps



Technical Specification

IP Rated Distribution Box for Internal/External Use	
Height	258mm
Width	186mm
Depth	61mm
Net weight	797 grams
Packed weight	875 grams
Packaged dimensions	275mm x 197mm x 65mm
IP rating	IP65
Suitable for adaptor type	SC Duplex LC Quad
Number of fibres	12
Number of ports	6
Cable entry 20mm	1
Cable exit 20mm	2
Material	ABS
Colour	RAL 7035
Operating temperature	-40°C to +50°C
Designed in accordance with	TIA/EIA 568.C, ISO/IEC 11801, EN50173, IEC60304, IEC61754, EN297-1
Compliant to	RoHS, Reach/SVHC

Applications

- ▶ Data centres, premise installations, telecommunication networks
- ▶ Ethernet, Fibre Channel, ATM, LAN, MAN and WAN
- ▶ Data communication and telecommunication networks
- ▶ Indoor applications

Ordering Information

W24XXX00

W25 Indoor / Outdoor Lockable Distribution Box IP65 Rated Up to 4 fibres

fibres

W25


This Lockable IP65 distribution box offers the ability to terminate 4 fibres housed in a strong robust ABS enclosure for indoor and outdoor applications.

With the ability to use a full array of adapter types offering a flexible solution to the end user, enabling them to incorporate a multi functional enclosure which allows easy access during installation or re-work with no disturbance of the existing cable or fibres.

In addition to the array of adaptors the enclosure also offers up to 4 exit points for patching cables and 1 standard cable entry points for loose tube, tight buffer, pre-terminated and steel tape armoured cable.

Each enclosure has integrated strength member tie positions and bend radius protection with the addition of a removable front door allowing for quick and easy installation.

- ▶ Up to 4 fibres
- ▶ Removable splice tray for easy installation
- ▶ Multiple adapter options available
- ▶ 2 adapter positions
- ▶ IP 65
- ▶ Accepts loose tube, distribution and pre terminated cables
- ▶ Integrated bend radius protection
- ▶ Sealing glands for up to 4 cables
- ▶ Lockable door
- ▶ Removable door for ease of installation
- ▶ ROHS, REACH SvHC
- ▶ Supplied with 12 heatshrink splice protectors
- ▶ Supplied with transit tubing
- ▶ Supplied with wall fixings and tie wraps

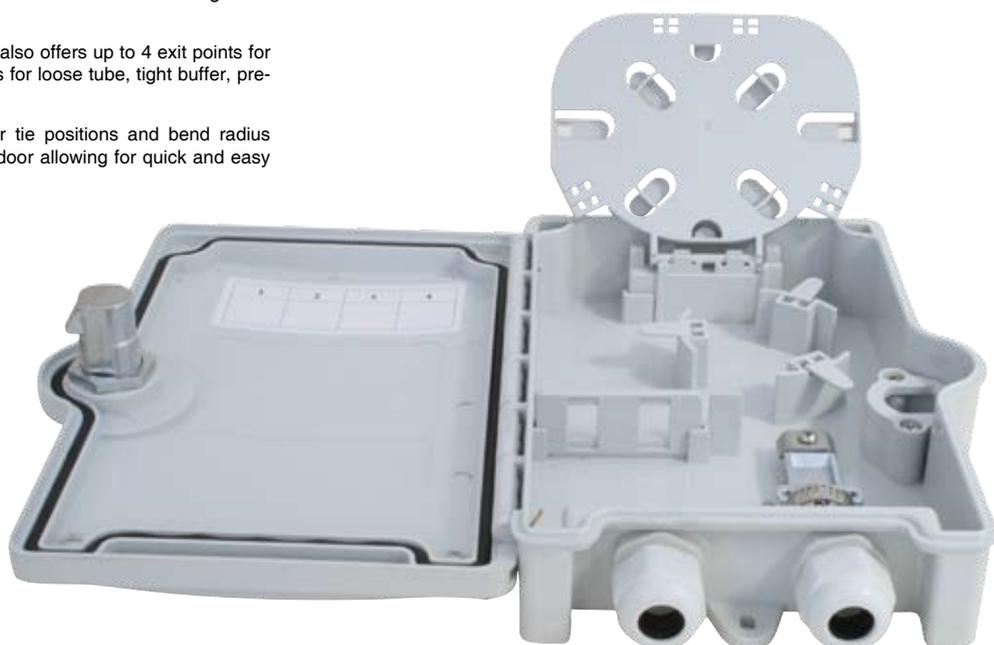

Technical Specification

IP Rated Distribution Box for Internal/External Use	
Height	TBA
Width	TBA
Depth	TBA
Net weight	TBA
Packed weight	TBA
Packaged dimensions	TBA
IP rating	IP65
Suitable for adaptor type	SC Simplex LC Duplex
Number of fibres	4
Number of ports	2
Cable entry 20mm	1
Cable exit 20mm	1
Material	ABS
Colour	White
Operating temperature	-40°C to +50°C
Designed in accordance with	TIA/EIA 568.C, ISO/IEC 11801, EN50173, IEC60304, IEC61754, EN297-1
Compliant to	RoHS, Reach/SVHC

Applications

- ▶ Data centres, premise installations, telecommunication networks
- ▶ Ethernet, Fibre Channel, ATM, LAN, MAN and WAN
- ▶ Data communication and telecommunication networks
- ▶ Indoor applications

Ordering Information

W25XXX00